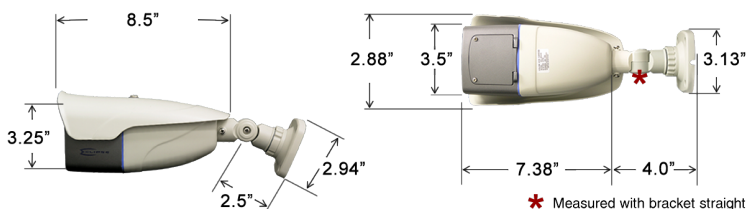


ANALOG
AHD
HIGH DEF

KEY BENEFITS

- 1/3" MEGA PIXEL SONY CMOS IMX238 SENSOR
- DUAL OUTPUT: A-HD & ANALOG OSD SELECTABLE
- MID RANGE 9-22MM VARIFOCAL MP RATED LENS
- DROP DOWN INSTALLERS PORT
- SMOOTH CONSISTENT LONG RANGE INFRARED
- BRIGHT WHITE DETERRENT STROBE LED
- INDUSTRIAL SURVEILLANCE

Best long range radiant infrared coverage for the price. This premium quality outdoor bullet camera provides users with 720P A-HD output or 1200TVL Analog output (OSD Selectable). The built-in infrared array provides exceptionally even and consistent long-distance coverage. The varifocal lens can be adjusted quickly thanks to a weatherproof Installer Port that also conceals an auxiliary video connector for use during installation and the mini-joystick for adjusting the on-screen display (OSD) menu.

SPECIFICATIONS

| | |
|----------------------|--|
| Video Sensor | 1/3" 2.4 Megapixel SONY CMOS IMX238 |
| Lens | 9-22mm Megapixel rated Varifocal lens |
| Resolution | Digital: 1480×1080P Analog: 960H - 1200TVL |
| IR range | 90 - 120 feet / 27-37 meters |
| IR LED | 47 IR LEDS |
| Video Output | A-HD: 1080P / 960P BNC CVBS: 1.0 Vp-p Composite Signal (75 Ω) |
| Electronic Shutter | AUTO/ MANUAL /FLK |
| Scanning System | Progressive Scan |
| Minimum Illumination | 0.2 LUX (0.0 LUX IR ON) |
| 3D-DNR | OFF / ON (LOW/MIDDLE/HIGH) |
| Digital WDR | OFF / ON (Level Adjustable) (Long and short exposure) |
| OSD | Yes |
| Strobe LED | White strobe LED (enable/disable) |
| White Balance | AWB/ ATW / PUSH / MANUAL |
| Back Light Control | OFF / ON |
| Defog | Digital ON / OFF |
| TV System | NTSC |
| Housing | Aluminium alloy |
| Power Consumption | 600mA |
| Working Temperature | -10°~ to 50°C / -14° +122 °F |
| Power | 12V DC |
| Dimension(L) (H) | 11.38 " x 3.25 " (inches) / 289 x 83 (mm) |
| Weight | 2.2 (lb) / 997.9 (g) |

